

suitable for 4-6 inch ceiling installation speakers with a maximum installation height of 110 mm!




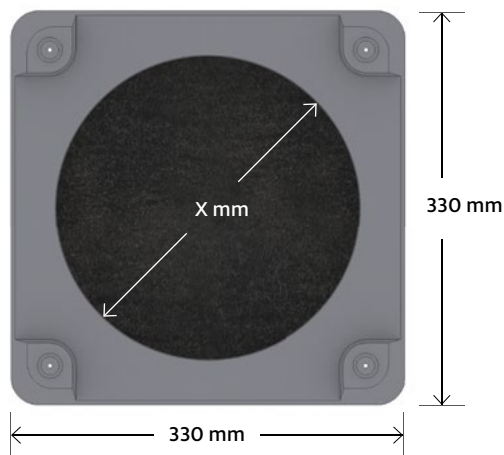


Image showing the maximum possible round cutout

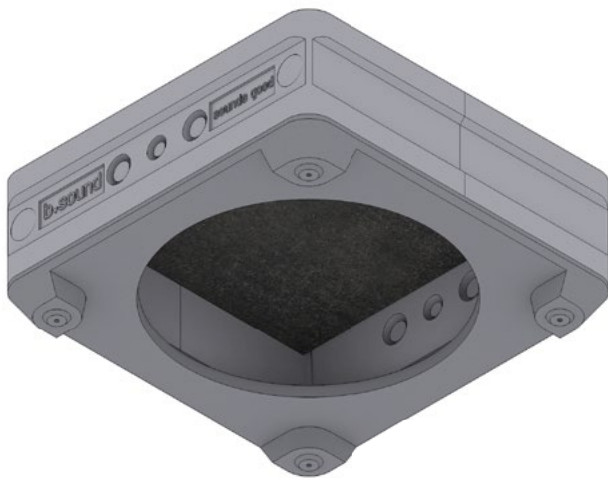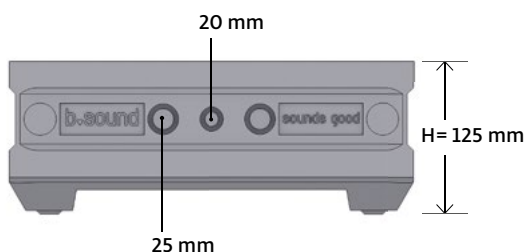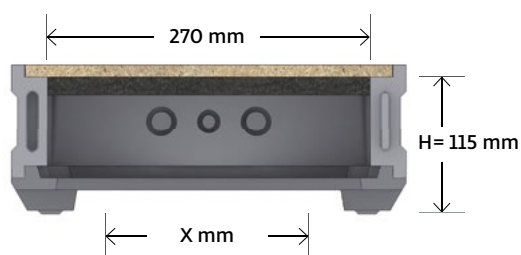

Description

Concrete ceiling installation box euroboxx®
Ceiling installation backbox with EPS body and MFP backlid.

Features and benefits

- two side cut-outs allow for best possible handling of electronic ductwork (20 mm + 25 mm)
- lightweight yet robust stability with excellent shock absorption features compared to other systems
- our materials deliver a better audio reproduction when compared to other boxes that come in wood, sheet metal or plastic
- better insulation with airborne- and structure-borne noise compared to conventional in-wall systems
- includes aluminum nails for easy fixing
- Inside equipped with acoustic insulation material 20 mm

Included in delivery (per piece)

- 1 euroboxx S (I-95)
in EPS grey, 50kg/m³ with glued in MFP-lid
- 1 universal adapter in EPS/PE anthracite 50 kg/m³
- 1 positioning-cube in EPS/PE anthracite 50 kg/m³
- 1 EPS/PE adapter ring white 15kg/m³
- 3 burnished steel nails 3,2 × 40 mm with big plastic lid
- 2 zinc-coated steel nails 3,5 × 60 mm
- 4 aluminum nails 4,5 × 155 mm
- 1 installation manual
- 1 cardboard packaging

Typ	euroboxx S (I-95)
Item number	10130
Dimensions	330 × 330 × 125 mm (L × W × H)
Depth	110 mm
Cut-Out-Dimensions X	circular: max. 260 mm square: 240 × 240 mm
Internal Volume	5,50 l
Fire protection class	B1
Pallet unit	78 Pieces



Video installation guide
<http://b-sound.ch/euroboxx-qr>